

LMSL-904-1A




Specifications Street light

W

Eco-friendly product
No Mercury, No Lead (RoHS standard)



LED info.	Nichia
Input Voltage	90~240Vac (50~60Hz)
Lamp Flux	13,000±10%
Lamp Luminous Efficiency	>68 lm/W
Color Rendering Index	Ra>70
Input Power	190W±10%
PF (Power Factor)	>0.9
Color Temperature	5,000 K
Working Temperature	-20~40°C
Working Humidity	10% ~ 90% RH
Housing & Lampshade	Alluminum Alloy & PC
Net Weight	12.5kg±5%
IP Rating	IP 65
Working Life	>40,000 hrs
Figuration Size	907 x 391 x 155 mm

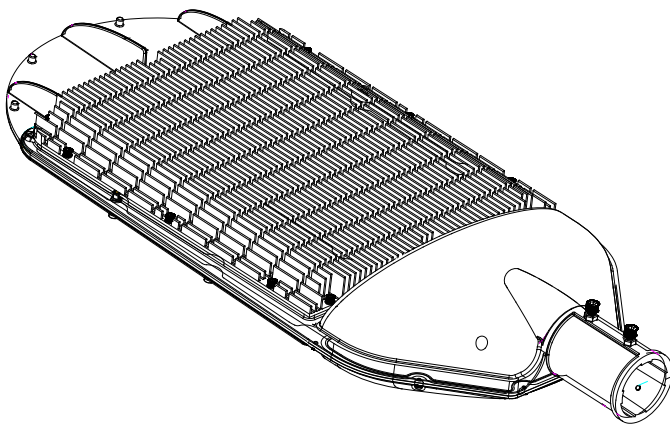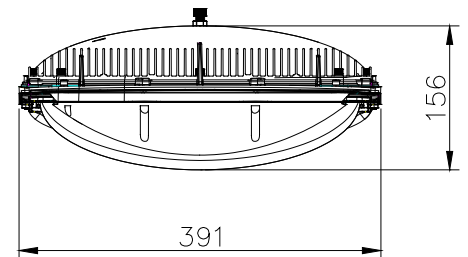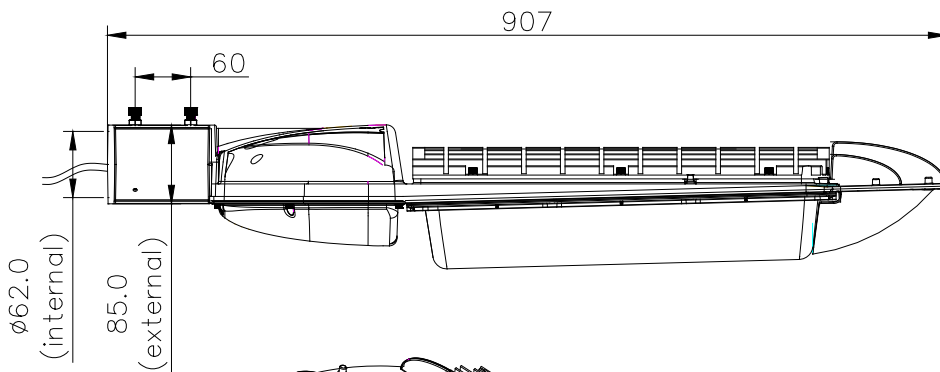

LEDLITEK

246 Kumho-ri Buyong-myeon, Cheongwon-gun, Chungcheongbuk-do, Korea, 363-942
Tel: +82-70-4331-3570 Fax: +82-43-263-3308